


For Security
Vari-Focal

YV2.8×2.8LA-SA2



2.8×



NEW

VARI
Vari-Focal

WIDE
Wide Angle

DC
DC Auto Iris

CS-mt
CS Mount

METAL
Metal Mount

ND
ND Filter


230
Long Cable

AT
Aspherical Lens

F0.95
Wide Aperture Rate

*Photograph is a similar model.

- Unparalleled brightness at the maximum aperture of F0.95, optimizing the performance at low lighting intensity.
- Super wide angle spec, WIDE2.8mm, achieving the horizontal field angle of 99 degrees (when used on 1/3 cameras).
- Compact and lightweight design, best suited for the use with dome cameras.
- High accuracy aspheric lens adopted, achieving the high quality image.
- Built-in ND filter of T360, supporting high sensitivity cameras.

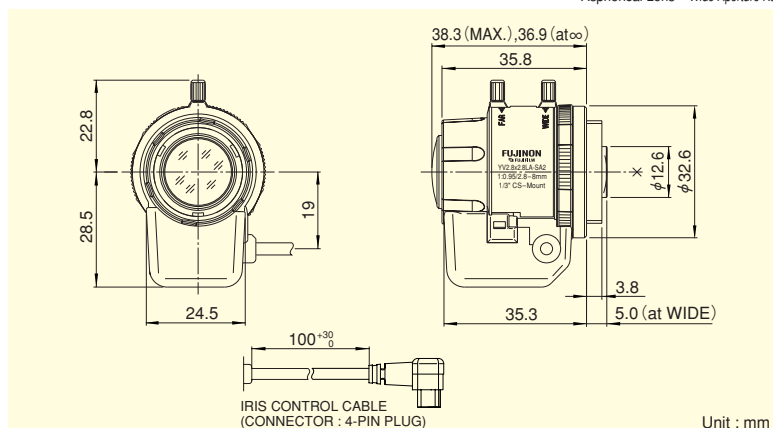

Focal Length (mm)			2.8~8 (2.8×	
Iris Range			F0.95 ~ T360 (Equivalent to F360)	
Operation	Zoom		Manual	
	Focus		Manual	
	Iris		Auto (DC Type) (*1)	
Angle Of View (H×V)	1/3"	WIDE	99°52′ × 73°17′	
		TELE	35°14′ × 26°24′	
	1/4"	WIDE	73°17′ × 54°19′	
		TELE	26°24′ × 19°47′	
Focusing Range (From Front Of The Lens) (m)			∞ ~ 0.3	
Object Dimensions at M.O.D. (H×V) (mm)	1/3"	WIDE	736 × 459	
		TELE	196 × 145	
	1/4"	WIDE	459 × 317	
		TELE	145 × 108	
Back Focal Distance (in air) (mm)			7.5	
Exit Pupil Position (From Image Plane) (mm)			91	
Filter Thread (mm)			—	
Mount			CS	
Mass (g)			45	
Coil Resistance			Drive Coil 190Ω Damping Coil 500Ω	
Current Consumption			23mA (Max.) at DC 4V	
Remarks			• With Metal Mount (*1) When power is turned off, iris will automatically be closed. YV2.8×2.8LA-SA2L : Long Cable Type (230mm)	

Wiring

