




www.FiberOpticBank.com

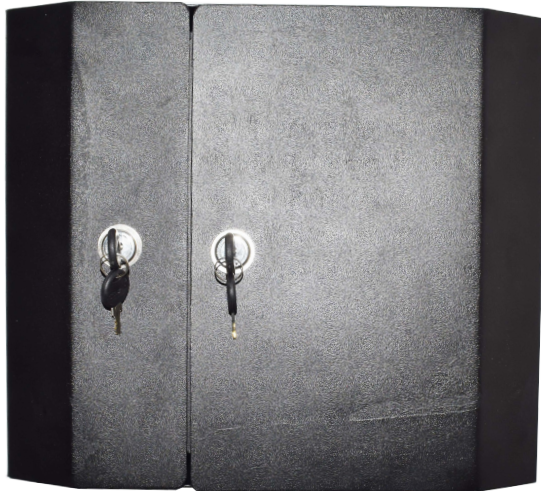

Product.

OCDF wall mount, Indoor

. Prod No


FOB-WM-49

Application and Properties:

OCDF wall mount is suitable for indoor applications and to Configure fiber to fiber or fiber to pigtail. The wall-mounted box Protects from splicing & pigtail management in performance.

- Other Details

- High resistance against water & dust penetration
- Has a wide area of communication that can be used for a variety of adaptors, FC, ST, SC, ...
- Has two cable outlets
- Easy installation & maintenance
- High quality material
- Complete accessorie includes cable ties, glands, cassette cap, fiber splice protection sleeves, rawl bolts, nuts, hole filler caps, & Instructions
- Easy operation, arrangement, splicing, slack storage and distribution

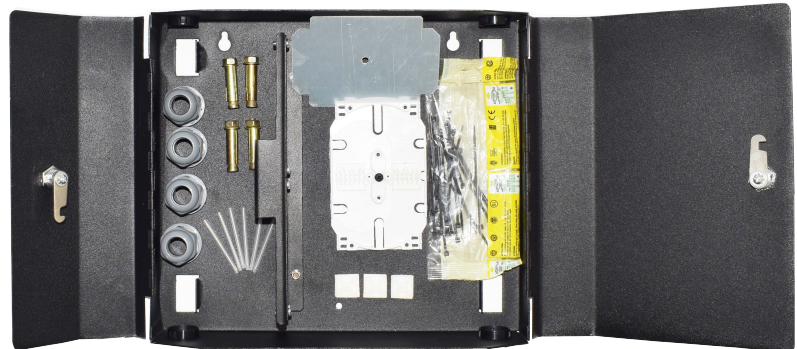

- Technical Specification

Item	Data
Product Name	Indoor Wall mount
Capacity	48 adaptors, acc. to request of customer
Number of cassettes	4 to 6
Capacity of each cassette	12 Tray splices
Dimensions, mm	Height :355
	Width: 304
	Depth:84.6
Accessorie	Cable ties, glands, cassette cap, fiber splice protection sleeves, rawl bolts, nuts, hole filler caps, & Instructions, acc.to picture

Dimensions, mm

